NPP-4840-FP-E6CD-NL

48x40 (Standard) Plastic Industrial Pallet

Technical Data

Dimensions Weight	
Load Capacities Static	
Dynamic	

40.0 lbs 8800 lbs

Racking220Entry4-wTruckload Qty510Stack TL / LTL17

4400 lbs 2200 lbs 4-way 510 17 / 15

TL (truckload) and LTL (less-than-truckload) quantities are approximate and may vary by transport equipment or other factors.

48x40x6.1 inches (1219x1016x155 mm)

Handling Data

Nestable No


Stackable Yes

Rackable Yes Reusability Multi-Trip Destination Captive

Airfreight Yes ISPM-15 Exempt Yes

Food Grade Yes, non-FDA

Pharmaceutical Yes

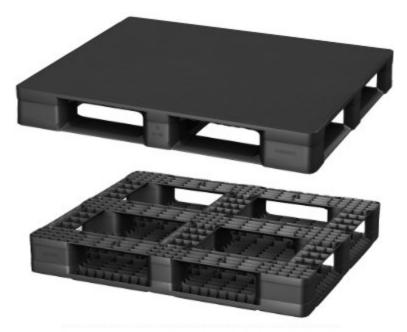



Materials and Colors

Condition New

Material HDPP (Recycled)

Color ed) Black (custom colors available)

Deck Specs

Top Deck Closed

Bottom Deck 6 Runner - Perimeter+2 Cross (cruciform perimeter base)

Available Options: RFID Transponders Individual Markings Anti-Slip Bottom Grommets ESD Prevention for Anti-Static FDA Version Rod Inserts for Increased Performance.

Features

Ideal for closed loops or distribution chains across industry sectors including Food, Retail, Medical and Pharmaceutical.

- High performance at low cost
- Top Safety Rim (raised lip) Removed
- Allows for safe double stacking
- Easy-to-clean hygienic design
- Suitable for packaged food items (not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations




Spec Sheet Generated On: 5/19/2024


Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.


NPP-4840-FP-E6CD-NL

48x40 (Standard) Plastic Industrial Pallet

Technical Drawings

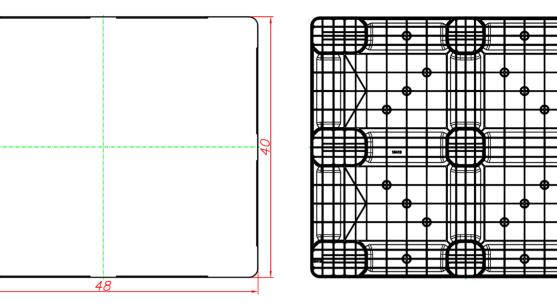

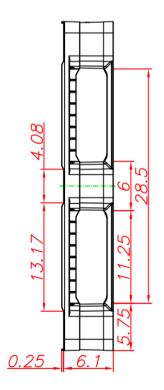

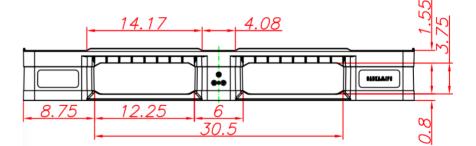



Tech Sheet Generated On: 5/19/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.

