PG-4840-N-NPT

48x40 (Standard) **Plastic Industrial Pallet**

Technical Data

Dimensions Weight
Load Capacities Static Dynamic Racking
Entry

6600 lbs 3000 lbs 4-way 1620

58

18 lbs

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

47.5x39.5x6 inches (1200x1000x152 mm)

Handling Data

Truckload Qty

Stack TL

Nestable Yes

Stackable No

Rackable No

Reusability One-Way & Multi-Trip Destination Export & Captive

Airfreight Yes

ISPM-15 Exempt Yes

Food Grade Yes, non-FDA

Pharmaceutical Yes





Materials and Colors

Condition New

Material

HDPE/PP (Recycled)

HDPE/PP (Virgin*)

Color Black Gray/Custom*

(High-Density Polyethylene/Polypropylene)

*Custom colors and markings available in virgin material. (Minimum quantities required.)

Deck Specs

Top Deck Open

Bottom Deck 9 Feet - Nesting

Available Options Anti-Slip Inserts (shown in red) Individual Markings

Features

• Temp 0 F to +172 F

Nesting saves storage & shipping costs

- Easy-to-clean hygienic design
- Suitable for packaged food items (not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- . Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations



Spec Sheet Generated On: 5/19/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.

PG-4840-N-NPT

48x40 (Standard) Plastic Industrial Pallet

Technical Drawings





1000mm / 39.5in


700mm / 27.5in

285mm / 11.2in

+130mm / 5.11in



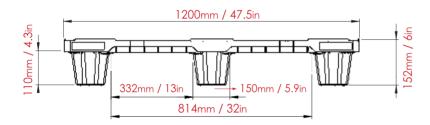

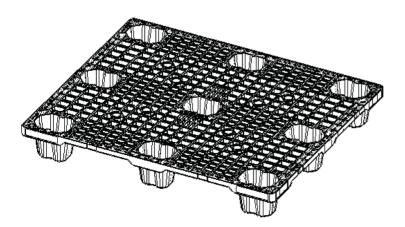



Tech Sheet Generated On: 5/19/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.