NPP-4840-N-RackNestFDA

48x40 (Standard) Plastic Industrial Pallet

Technical Data

D	in	٦e	'n	S	io	ns	5
W	e	ig	ιh	t			

48x40x4.8 inches (1219x1016x122 mm) 18.0 lbs

Load Capacities
Dynamic Racking
Entry

10500 lbs 3100 lbs 2700 lbs 4-way

1800

60

Truckload Qty Stack TL

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

Handling Data

Nestable Yes

Stackable Yes

Rackable


Yes

Reusability One-Way & Multi-Trip Destination Captive & Export

Airfreight Yes ISPM-15 Exempt Yes

Food Grade FDA Approved

Pharmaceutical Yes

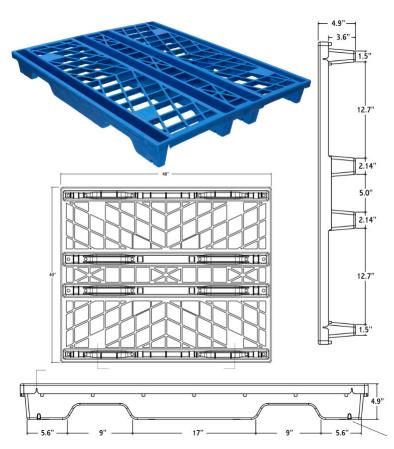



Materials and Colors

Condition New

Material HDPE Color FDA Blue (Virgin)

(High-Density Polyethylene)

Deck Specs

Top Deck Open

Bottom Deck

4 Runner - Unidirectional Long Side

Design Note: Runner in 40" direction in development. **Testing Note:** Load Capacities based on box unit load testing at the VT

Center for Packaging and Unit Load Design.

Features

Revolutionary Rackable & Nestable Design closely resembles wood pallet. Engineered to look and function like a traditional, wooden stringer pallet.

- Low profile (under 5") great for airfreight
- Automation friendly
- Compatible with most roller conveyors
- Nesting saves storage & shipping costs
- Allows for safe double stacking
- Low-cost Plastic Pallet
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations



Spec Sheet Generated On: 5/20/2024


Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.

NPP-4840-N-RackNestFDA

48x40 (Standard) Plastic Industrial Pallet

Technical Drawings



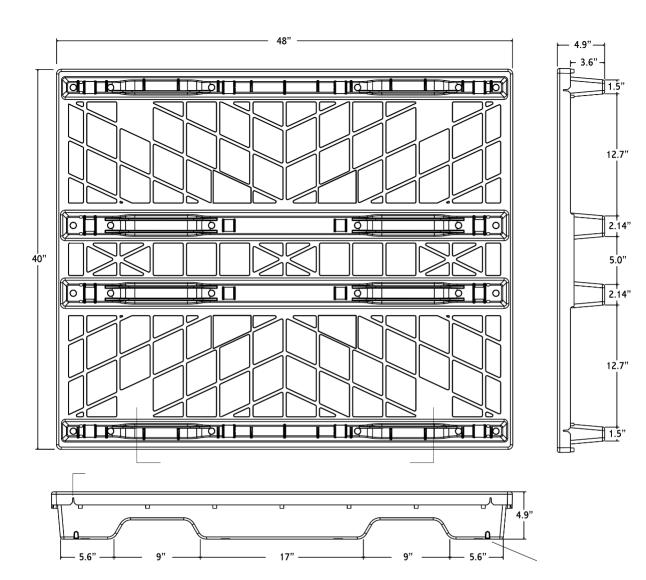



Tech Sheet Generated On: 5/20/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.