NPP-4840-N-RN21lbs

48x40 (Standard) **Plastic Industrial Pallet**

Technical Data

Dimensions Weight

48x40x5 inches (1219x1016x127 mm) 21.0 lbs

0	
Load Capacities	
Static	6000 lbs
Dynamic	3000 lbs
Racking	2200 lbs
Entry Truckload Qty Stack TL	4-way 1380 46

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

Handling Data

Nestable Yes

Stackable Yes

Rackable Yes

Reusability One-Way & Multi-Trip Destination Captive & Export

Airfreight Yes

ISPM-15 Exempt Yes

Food Grade Yes, non-FDA

Pharmaceutical Yes





Materials and Colors

Condition New

Material

HDPP (Recy

cled)	Color Black

(High-Density Polypropylene)

Deck Specs

Top Deck Open

Bottom Deck

4 Runner - Unidirectional Long Side

Racking only on the 48 inch side Optional anti-slip feet available

Features

Revolutionary Rackable & Nestable Design closely resembles wood pallet. Engineered to look and function like a traditional, wooden stringer pallet.

- Low profile (5") great for airfreight
- Automation friendly
- · Compatible with most roller conveyors
- Nesting saves storage & shipping costs
- Allows for safe double stacking
- Easy-to-clean hygienic design
- Suitable for packaged food items (not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- . Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations




Spec Sheet Generated On: 5/20/2024


Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.


NPP-4840-N-RN21lbs

48x40 (Standard) Plastic Industrial Pallet

Technical Drawings

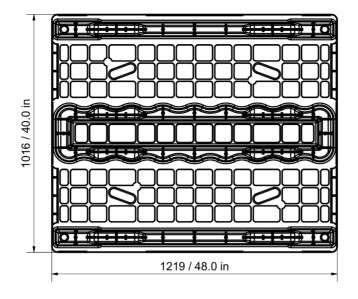

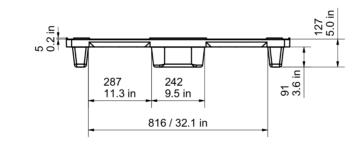





Tech Sheet Generated On: 5/20/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.

