


# UP-4840-FP-130mm30lbs

## 48x40 (Standard) Plastic Industrial Pallet

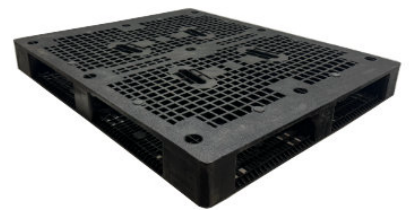

### Technical Data

Dimensions 48.0x40.0x5.1 inches (1219x1016x130 mm)  
Weight 30 lbs

#### Load Capacities

Static 30000 lbs  
Dynamic 3000 lbs  
Racking 3000 lbs

Entry 4-way  
Truckload Qty 540  
Stack TL / LTL -- / 18

Load capacities for used pallets may be unavailable or may have changed since issued. Unit load Sample Tests (ST) are recommended to confirm successful use with specific applications and equipment. TL (truckload) and LTL (less-than-truckload) quantities are approximate and may vary by transport equipment or other factors.

### Handling Data

<b>Nestable</b> No	<b>Reusability</b> One-Way & Multi-Trip	<b>ISPM-15 Exempt</b> Yes
<b>Stackable</b> Yes	<b>Destination</b> Captive & Export	<b>Food Grade</b> Yes, non-FDA
<b>Rackable</b> Yes	<b>Airfreight</b> No	<b>Pharmaceutical</b> Yes

### Materials and Colors

**Condition**  
Used

**Material**  
HDPE/PP

**Color**  
Black

(High-Density Polyethylene/Polypropylene)

All used pallets have been inspected and cleaned. Pallets may have limited cosmetic damage, but all are structurally sound.

### Deck Specs

**Top Deck**  
Open

**Bottom Deck**  
6 Runner - Perimeter+2 Cross  
(cruciform perimeter base)

### Features

- Flow-through design reduces contaminant spaces and allows easy cleaning and drying
- Molded-in deck pads support multiple box layout configurations to protect box corners
- Low profile 5.1" height optimized for double stacking in racks and truckloads
- Comfortable hand holds for easy manual handling
- Allows for safe double stacking
- Easy-to-clean hygienic design
- Suitable for packaged food items  
(*not approved for direct food contact*)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations



**Nelson**<sup>TM</sup>

The Nelson Company

(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)

[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)